


Brillia HD LH-PLE

High Definition processed thermal CTP plate for long-run commercial and web applications

Brillia HD LH-PLE brings the quality and consistency of FUJIFILM High Definition CTP to users of thermal platesetters, allowing you to achieve consistently higher quality print, with a new, strong alloy to reduce the need for costly remakes and downtime.

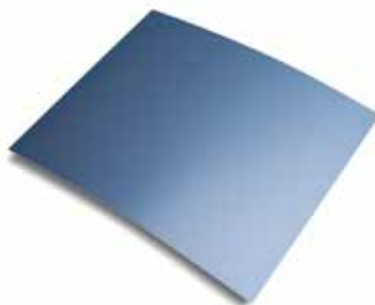

lo-chem

- ▶ Low-chemistry working
- ▶ Long run-length capability - up to 300,000 impressions
- ▶ New strong alloy
- ▶ High scratch resistance
- ▶ Extended run-length with post bake
- ▶ Wide exposure and processing latitude for consistent high quality

Specifications

Brillia HD LH-PLE	
Print application	long-run commercial, sheet-fed and web offset
Laser type	thermal LD 830 nm (800 – 850 nm)
Technology	processed
Sensitivity	100 – 120 mJ/cm ²
Resolution	200 lpi (1 – 99%)
FM screen compatible	yes, FM20 (device-dependent)
Gauges	0.30 and 0.40 mm
Safelight	white: 1 hour; UV-cut: 2 hours; yellow: 12 hrs
Shelf life	2 years
Latent image	excellent after processing
Contrast	excellent
Developer / replenisher	FUJIFILM DT-2WE / DT-2RE (FCT-E12 / FCT-E13)
Bath life**	3 months or 8,000 m ² (FLH-Z processor)
Gum	FUJIFILM FN-6CWE
Run length* unbaked	300,000
Run length* baked	400,000
UV-ink characteristics (unbaked)	150,000
UV-ink characteristics (baked)	150,000 - 200,000

*run lengths are always dependent on laser power and press conditions

**dependent on good processor maintenance and environment

The FUJIFILM Brillia High Definition CTP plate range includes violet and thermal types, with processed, low-chemistry and processless variants. All benefit from FUJIFILM's High Definition emulsion for extended imaging latitude and FUJIFILM's unique MultiGrain for better on-press performance.

Please contact your local FUJIFILM partner for further information.

FUJIFILM

FUJIFILM Deutschland
Niederlassung der
FUJIFILM Europe GmbH
T +49 211 5089 255
grafische_systeme@fujifilm.de
www.fujifilm.de

FUJIFILM UK Ltd
T +44 1234 245 245
marketing.fgs@fujifilm.co.uk
www.fujifilm.co.uk/gs

FUJIFILM Graphic Systems
France SAS
T +33 1 64 76 71 00
commercial@fujigraphic.fr
www.fujifilmgraphic.fr

FUJIFILM Danmark A/S
T +45 45 66 22 44
fujifilm@fujifilm.dk
www.fujifilm.dk

FUJIFILM Italia S.r.l.
T +39 02 89 58 21
graphic.arts@fujifilm.it
www.fujifilm.it